
The steel manifold

Introduction:

The steel manifold for floor heating installations is provided with CALEFFI products and a Grundfos pump.

This manifold is available from 1 to 15 circuits.

All the steel components are electrolytically galvanised and are highly protected against rust.

Description:



The steel manifold of CALEFFI is pre-assembled with:


- Return manifold provided with:
 - 1 thermostatic valve;
 - 1 lockshield valve;
 - 1 thermostatic valve (series 339) for each circuit. (3/4" euroconus)
- Flow manifold provided with:
 - 1 lock shieldvalve (series 436) for each circuit (3/4" euroconus);
 - a temperature gauge;
 - a pocket for the contact probe of the thermostatic head;
 - a safety thermostat;
 - a drain cock.
- Grundfos circulation pump.
Type: - UPS 25-40: 1 to 5 circuits
- UPS 25-50: 6 to 10 circuits
- UPS 25-60: 11 to 15 circuits
- Mounting brackets. Without screws.

The following articles are delivered separately with the steel manifold.

- Automatic air vent. Chrome plated.
- Thermostatic head with contact probe.

Dimensions:

Article number	Outlets	B (mm)	H (mm)
NLST254001	1	302	356
NLST254002	2	302	356
NLST254003	3	302	356
NLST254004	4	362	356
NLST254005	5	422	356
NLST255006	6	482	363
NLST255007	7	542	363
NLST255008	8	602	363
NLST255009	9	662	363
NLST255010	10	722	363
NLST256011	11	782	363
NLST256012	12	842	363
NLST256013	13	902	363
NLST256014	14	962	363
NLST256015	15	1022	363

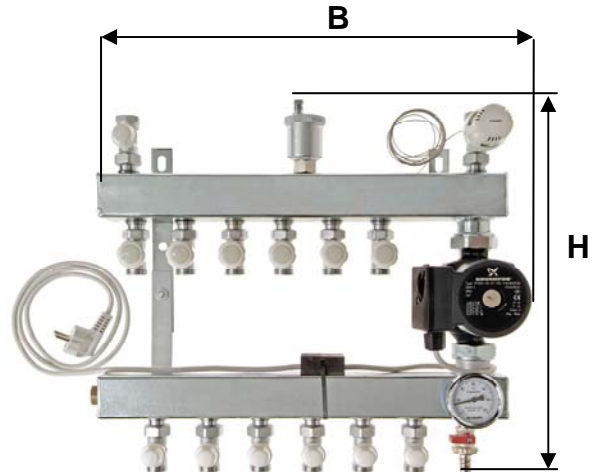

Option: Wireless regulation. Series 740.

It is possible to equip the steel manifold with a wireless zone-regulation for a wireless operation of different zones.



The wireless regulation consists of a transmitter and a receiver. The receiver is available for 1, 2 or 8 zones. The 8 zone receiver uses a connection box to connect the thermo-electric actuators.

Because of the frequency (868,35 MHz) and the double transmitting of the signal, the system is less susceptible for interference.

Article number	Description
740000	Wireless chrono-thermostat
740100	Receiver 1 zone
740102	Set: Wireless chrono-thermostat + receiver 1 zone
740104	Receiver 2 zones
740201	Wireless thermostat
740202	Receiver 8 zones
740208	Connection box 8 zones

If you have questions, please contact:



CALEFFI International Nv
Moesdijk 10-12
P.O.B. 10357
6000GJ Weert

Tel. NL: +31 495 54 77 33
B: +32 89 38 68 68

Fax NL: +31 495 54 84 02
B: +32 89 38 54 00